

TMK 10 FAST ACTION, WIDE RANGE



Despite a hopper volume of 1.0 m³, the TMK 10 has a wide cruising radius, limited only by the load capacity of the towing vehicle.

Depending on the type and quantity of material per m², a load capacity of 10 tons gives a range of up to 300 km when spreading salt and 80 km when spreading sand.

The total width of the TMK is either 2500 mm or 2750 mm, and thus the spreader is suitable for a range of lorries.

All Epoke spreaders deliver the set amount evenly and accurately, achieving the desired spread rate for each job resulting in financial savings and a cleaner environment.



EPOKE TMK 10

(2006-09-12.BA)

Technical data and dimensions

Features:

TMK 10 is a road-speed related spreader. The spreading quantity is adjusted by the adjustment lever at the rear of the spreader.

The lightweight, but yet robust construction of the TMK 10 spreader allows one man to maneuver the spreader easily and effortlessly by means of the fold-away handle on the back of the spreader.

Coupling and decoupling are easy one-man operations, with the spreader support legs ensuring maximum safety for the crew during the manoeuvring.

The vast cruising range of the spreader is attributable to the fact that the spreader is adapted to lorries with tipping bodies, from which the spreader is refilled.

Salt, sand, gravel, abrasives, and other common spreading materials and combinations of these are spread with the same even distribution and accuracy.

Fine adjustment of the quantity is done by adjusting the spring base tension, thereby ensuring a constant spread rate without regard to the speed.


TMK 10 spreaders permit moist materials to be used, as the impellor prevents material bridging and ensures that any lumps caused by moisture in the material are broken down.

Like all other Epoke products, TMK spreaders are very durable. TMK 10 features surface treatment consisting of sandblasting, zinc dust priming, 2-component polyurethane base coat and a 2-component top coat.

Capacity:	920 l
Total width:	2500 or 2750 mm
Track gauge:	2332 mm
Spreading width min.:	2000 mm
Self-weight:	400 kg

Standard equipment: Lights and reflectors, chains, impellor, manual clutch.

Optional equipment: Electronic remote control coupling, cover, rubber edges and fittings for forklift trucks.

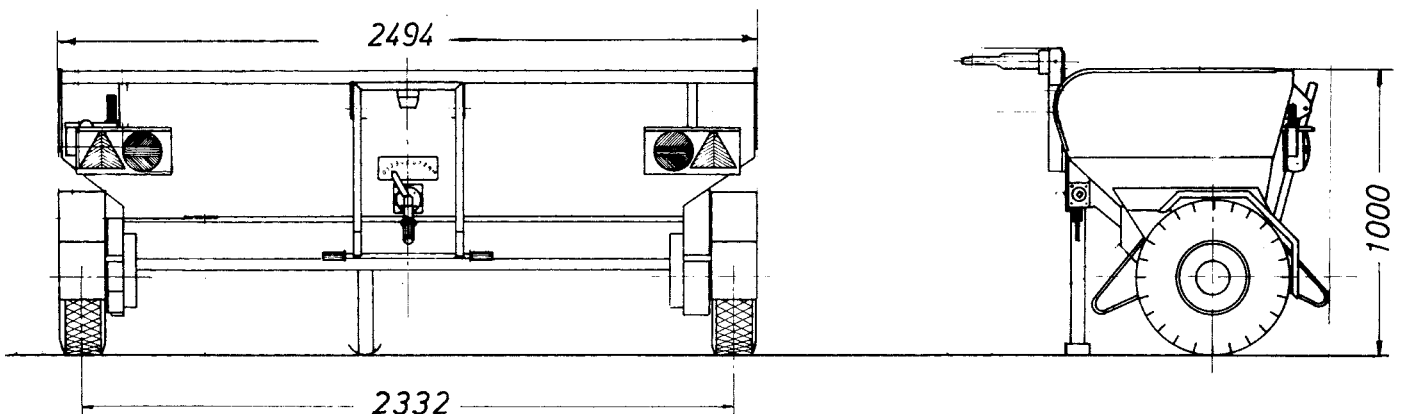

In order to maintain the high and uniform product standard Epoke® A/S has been certified by Lloyd's register to ISO 9001:2000.
TLG B-3 approval - GS approval - E1 approval
RoHS directive - WEEE directive

– de-icing of roads!

Epoke® A/S
Vejenvej 50, Askov
DK-6600 Vejen
Tel. +45 76 96 22 00
Fax +45 75 36 38 67
epoke@epoke.dk
www.epoke.dk

